



## SOLAR PREMIUM LINE FLOODED SPRE 06 255



1900 CYCLES @ 50 % DOD

### • **TRULY DEEP CYCLE – 8 YEARS LIFE BASED ON IEC 61427**

- BCI Group GC2, 6V
- Reserve Capacity [Ah@20hr rate]: 229
- Reserve Capacity [Ah@100hr rate]: 255
- Energy [kWh]: 1.53
- Weight: 67 lbs.
- Length: 10.30 in (262 mm)
- Width: 7.13 in (181 mm)
- Height: 11.74 in (298 mm)
- LT
- BAYONET / SINGLE POINT



### Premium Line Flooded

Renewable energy applications operate under challenging conditions such as fluctuating or extreme temperatures, remote locations and the intermittent nature of solar and wind power generation. Designed to deliver long battery life, Trojan Battery's Solar Premium Line of flooded deep-cycle batteries is specifically engineered to withstand the rigorous conditions of renewable energy applications. The Solar Premium Line incorporates advanced battery features such as Trojan's DuraGrid™, MaxGuard® XL separator and Alpha Plus® Paste technologies that provide superior performance, rugged durability and exceptional long life. In addition, Trojan has addressed the issue of partial state of charge (PSOC) by introducing our proprietary new technology, Smart Carbon™, to our Solar Premium Line of deep-cycle batteries. Trojan's product strategy is focused on one simple objective – manufacture the highest quality battery available in the industry, which is why Trojan's Solar Premium Line is tested to IEC standards.

[WWW.NATIONWIDE-BATTERY.COM](http://WWW.NATIONWIDE-BATTERY.COM)





## DATA SHEET

MODEL SPRE 06 255

VOLTAGE 6V

CAPACITY 255Ah @ 100Hr

MATERIAL Polypropylene

BATTERY TYPE Deep Cycle Flooded / Wet Lead Acid Battery

6V

### PRODUCT + PHYSICAL SPECIFICATIONS

BCI Group Size	Type	Voltage	Cell(s)	Terminal Type <sup>G</sup>	Dimensions <sup>C</sup> Inches (mm)			Weight Lbs. (kg)
GC2	SPRE 06 255	6	3	16	Length	Width	Height <sup>F</sup>	67 (30)
					10.30 (262)	7.13 (181)	11.74 (298)	

### ELECTRICAL SPECIFICATIONS

Cranking Performance		Capacity <sup>A</sup> Minutes		Capacity <sup>B</sup> Amp-Hours (AH)							Energy (kWh)	Internal Resistance (mΩ)	Short Circuit Current (amps)
C.C.A. <sup>D</sup> @ 0°F (-18°C)	C.A. <sup>E</sup> @ 32°F (0°C)	@ 25 Amps	@ 75 Amps	2-Hr	5-Hr	10-Hr	20-Hr	48-Hr	72-Hr	100-Hr	100-Hr	—	—
—	—	--	--	--	--	211	229	244	249	255	1.53		

### CHARGING INSTRUCTIONS

Charger Voltage Settings (at 77°F/25°C)				
System Voltage	6V	12V	24V	48V
Maximum Charge Current (% of C <sub>20</sub> Rate)*	13 %			
Maximum Absorption Phase Time (hours)	4			
Absorption Voltage**	7.35	14.70	29.40	58.80
Float Charge	6.75	13.50	27.00	54.00
Equalize Charge	8.10	16.20	32.40	64.80

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

\* If Charging time is Limited contact Trojan Technical Support for Assistance

\*\* In cases where controller has a bulk voltage setting, use absorption voltage setting above



Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.



WWW.NATIONWIDE-BATTERY.COM


CHARGING TEMPERATURE COMPENSATION

Add	Subtract
0.005 volt per cell for every 1°C below 25°C	0.005 volt per cell for every 1°C above 25°C
0.0028 volt per cell for every 1°F below 77°F	0.0028 volt per cell for every 1°F above 77°F

OPERATIONAL DATA

Operating Temperature	Self Discharge
-4°F to 122°F (-20°C to 50°C)	Less than 3% per month depending on storage temperature conditions
At temperatures below 32°F (0°C) maintain a state of charge greater than 60%	

BATTERY DIMENSIONS

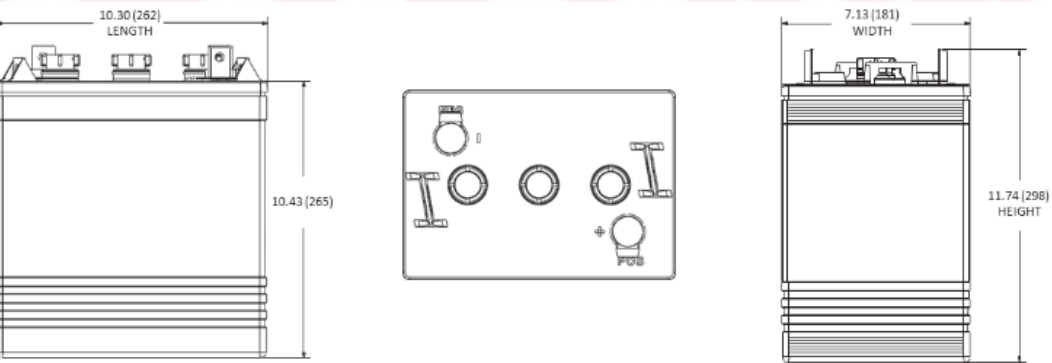


EXPECTED LIFE VS. TEMPERATURE

Chemical reactions internal to the battery are driven by voltage and temperature. The higher the battery temperature, the faster chemical reactions will occur. While higher temperatures can provide improved discharge performance the increased rate of chemical reactions will result in a corresponding loss of battery life. As a rule of thumb, for every 10°C increase in temperature the reaction rate doubles. Thus, a month of operation at 35°C is equivalent in battery life to two months at 25°C. Heat is an enemy of all lead acid batteries, FLA, AGM and gel alike and even small increases in temperature will have a major influence on battery life.

STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE

Percentage Charge	Specific Gravity	Cell	6 Volt
100	1.277	2.122	6.37
90	1.258	2.103	6.31
80	1.238	2.083	6.25
70	1.217	2.062	6.19
60	1.195	2.040	6.12
50	1.172	2.017	6.05
40	1.148	1.993	5.98
30	1.124	1.969	5.91
20	1.098	1.943	5.83
10	1.073	1.918	5.75

TERMINAL CONFIGURATION

16	SLT	Small L-Terminal
		
Terminal Height Inches (mm) 1.28 (32.5)		
Torque Values: in-lb (Nm) 95 -105 (11 - 12)		
Bolt Size 5/16"-18		

SMART CARBON™

Deep-cycle batteries used in off-grid and unstable grid applications are heavily cycled at partial state of charge (PSOC). Operating at PSOC on a regular basis can quickly diminish the overall life of a battery, which results in frequent and costly battery replacements. To address the impact of PSOC on deep-cycle batteries in renewable energy (RE), inverter backup and telecom applications, Trojan Battery has now included Smart Carbon™ as a standard feature in its Industrial and Premium flooded battery lines.

A. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 86°F (30°C) for all rates and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.  
B. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.

C. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.  
D. Terminal images are representative only.  
E. A boost charge should be performed every 6 months when batteries are in storage.  
F. Weight may vary.




Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.


WWW.NATIONWIDE-BATTERY.COM



## PERCENT CAPACITY VS. TEMPERATURE

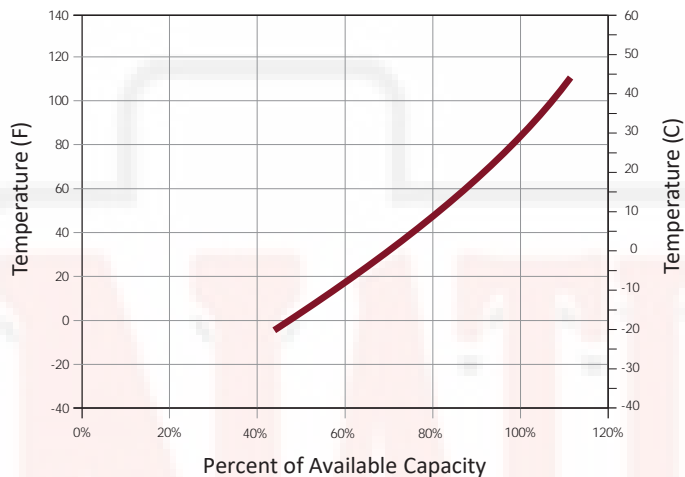

## SELF DISCHARGE VS. TIME\*

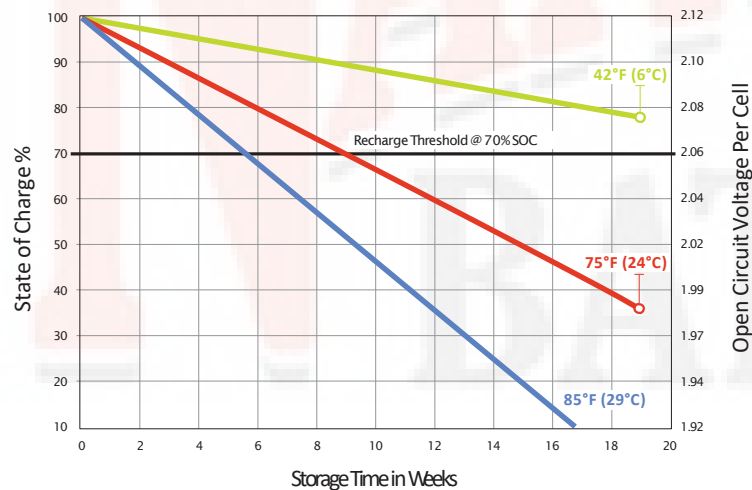

## \*PERIODIC CHARGE

### FREQUENCY

Provide a periodic freshening charge to maintain a SOC greater than the threshold of 70%.

## DOD VS CYCLE LIFE IN A STATIONARY APPLICATION

