



# SCS200



## • TRULY DEEP CYCLE – MAXGUARD T2

- BCI Group 27, 12V
- Reserve Capacity [Ah@20hr rate]: 115
- Reserve Capacity [Ah@100hr rate]: 128
- Energy [kWh]: 1.54
- Weight: 60 lbs.
- Length: 12.80 in (324 mm)
- Width: 6.73 in (171 mm)
- Height: 9.80 in (248 mm)
- DWNT
- VENT

T<sub>2</sub> Technology™



### Marine / RV Line Flooded

**Trojan's flooded line of 12-volt deep-cycle starting batteries featuring T2 Technology are engineered for sustained capacity and total overall ampere-hours, resulting in more operating power to explore the great outdoors.**

Providing rugged durability, outstanding performance and long life, Trojan's deep-cycle 12-volt starting batteries are ideal a variety of marine and RV applications.



**TROJAN**  
BATTERY COMPANY

**DATA SHEET**

MODEL SCS200  
VOLTAGE 12V  
CAPACITY 115Ah @ 20Hr  
MATERIAL Polypropylene  
BATTERY TYPE Deep Cycle Flooded / Wet Lead Acid Battery

**12V**

**PRODUCT + PHYSICAL SPECIFICATIONS**

BCI Group Size	Type	Voltage	Cell(s)	Terminal Type <sup>6</sup>	Dimensions <sup>c</sup> Inches (mm)			Weight Lbs. (kg)
					Length	Width	Height <sup>f</sup>	
					27	SCS200	12	

**ELECTRICAL SPECIFICATIONS**

Cranking Performance		Capacity <sup>A</sup> Minutes		Capacity <sup>B</sup> Amp-Hours (AH)				Energy (kWh)	Internal Resistance (mΩ)	Short Circuit Current (amps)
C.C.A. <sup>D</sup> @ 0°F (-18°C)	C.A. <sup>E</sup> @ 32°F (0°C)	@ 25 Amps	@ 75 Amps	5-Hr	10-Hr	20-Hr	100-Hr	100-Hr	—	—
620	760	200	52	95	105	115	128	1.54		

**CHARGING INSTRUCTIONS**

Charger Voltage Settings (at 77°F/25°C)				
System Voltage	12V	24V	36V	48V
Bulk Charge	14.82	29.64	44.46	59.28
Float Charge	13.50	27.00	40.50	54.00
Equalize Charge	16.20	32.40	48.60	64.80

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

**CHARGING TEMPERATURE COMPENSATION**

Add	Subtract
0.005 volt per cell for every 1°C below 25°C	0.005 volt per cell for every 1°C above 25°C
0.0028 volt per cell for every 1°F below 77°F	0.0028 volt per cell for every 1°F above 77°F

**OPERATIONAL DATA**

Operating Temperature	Self Discharge
-4°F to 122°F (-20°C to 50°C) At temperatures below 32°F (0°C) maintain a state of charge greater than 60%	Less than 3% per month depending on storage temperature conditions

**STATE OF CHARGE MEASURE OF OPEN-CIRCUIT VOLTAGE**


Percentage Charge	Specific Gravity	Cell	12 Volt
100	1.277	2.122	12.73
90	1.258	2.103	12.62
80	1.238	2.083	12.50
70	1.217	2.062	12.37
60	1.195	2.040	12.24
50	1.172	2.017	12.10
40	1.148	1.993	11.96
30	1.124	1.969	11.81
20	1.098	1.943	11.66
10	1.073	1.918	11.51




Designed in compliance with applicable BCI, DIN, BS and IEC standards. Tested in compliance to BCI and IEC standards.




## TROJAN SCS200 PERFORMANCE

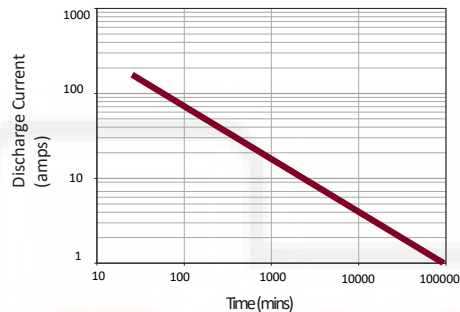

## PERCENT CAPACITY VS. TEMPERATURE

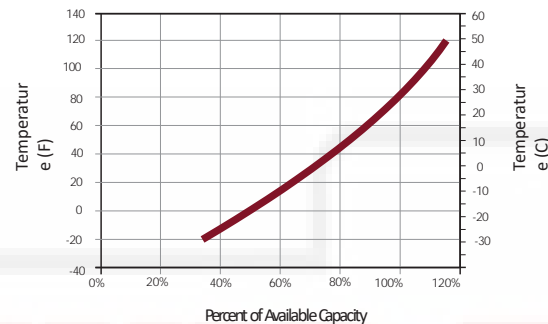


## BATTERY DIMENSIONS

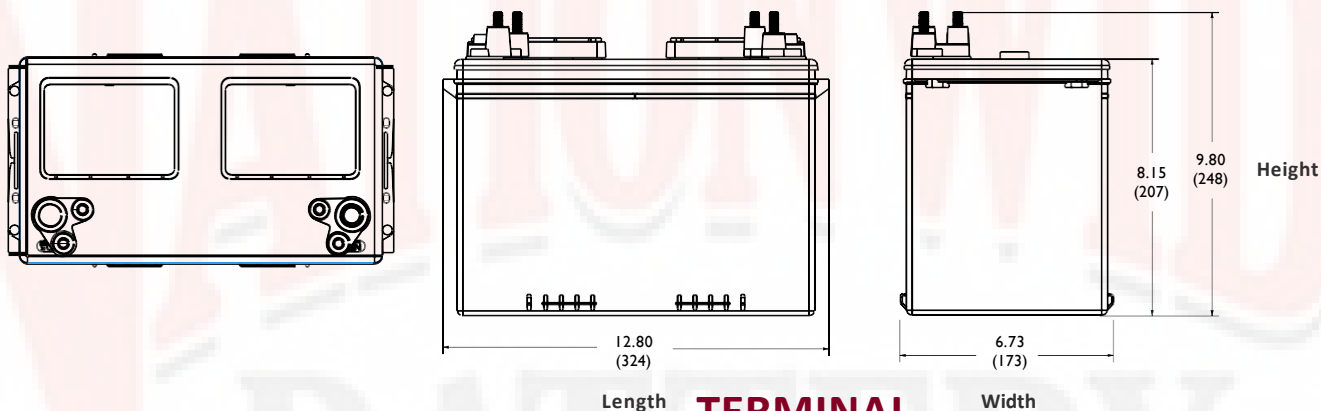

Length **TERMINAL** Width

## CONFIGURATIONS

10	DWNT	Dual Wingnut Terminal
		<p><b>Terminal Height Inches (mm)</b> 1.57 (39)</p> <p><b>Torque Values In-lb (Nm)</b> 95 – 105 (11 – 12)</p> <p><b>Bolt</b> 5/16"</p>

A. The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate at 86°F (30°C) for all rates and maintain a voltage above 1.75V/cell. Capacities are based on peak performance.  
 B. Dimensions may vary depending on type of handle or terminal. Batteries should be mounted with 0.5 inches (12.7 mm) spacing minimum.

C. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.  
 D. Terminal images are representative only.  
 E. A boost charge should be performed every 6 months when batteries are in storage.  
 F. Weight may vary.